


06BULT/08BULT




封装形式		06BULT/08BULT	
中心波长 (nm)		808	980
光学	P_{op} W	2	3
	nm	±10	
	FWHM nm	<6	
	/ T nm/	0.3	
	P_a mW	2	
	a nm	650±10	
	V_a V	2.2	
学	I_{th} A	0.4	0.6
	I_{op} A	2.4	4
	V_{op} V	2.1	2.2
	η_{es} W/A	1	0.9
	R_t k / 25	10±5%/3450	
光纤	D_{core} m	200	
	D_{clad} m	220	
	D_{buffer} m	400	
	NA	0.22	
		SMA905	

参数	工作温度 (°C)	工作相对湿度 (%)	存储温度 (°C)	存储相对湿度 (%)	引脚焊接温度 (max/°C)
最小	10	-	-20	-	-
最大	30	75	70	90	250(10Sec.)



* D -
 * P -
 FS -

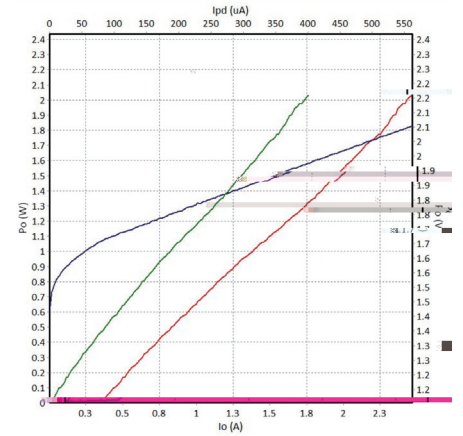

808nm P-I-V

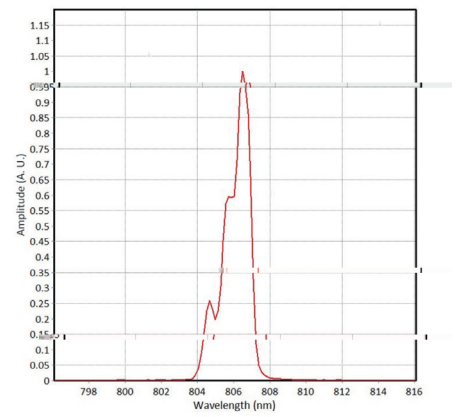

808nm

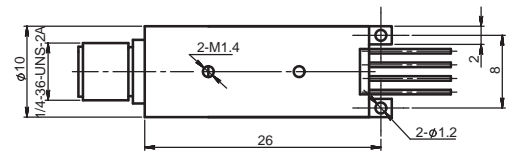

06BULT

08BULT

