

便



μ

光学参数						
(nm)	1064			532		
(kHz)	1*	2.5	2.5*	1*	2.5	2.5*
(mW)	200	300	500	100	150	250
(μJ)	200	110	180	100	55	90
(ps)	2000			1500		
(8h)	±3%					
	TEM <sub>00</sub>					
Typ.(mrad)	@1/e <sup>2</sup>	3			2.5	
	@1/e <sup>2</sup>	3			2.5	
	>100:1					
系统参数						
	100-240 VAC 50/60 Hz					
	RS232 USB					
(W)	20	20	25	20	25	25
(W×H×L,mm)	90×32.6×120					
(W×H×L,mm)	45×30×120					
( )	15~35					
( )	0~60					

<20kHz

>20kHz

TTL 5V SMA

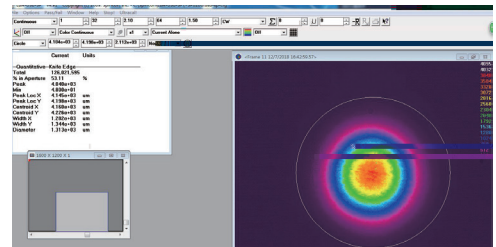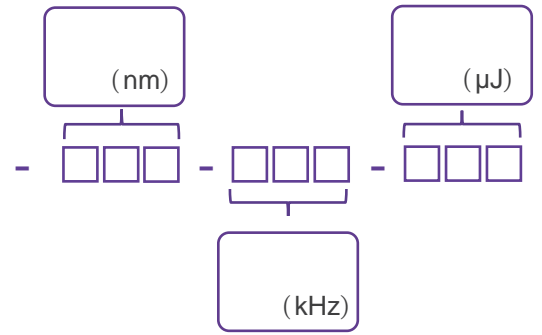

( )

( )